


# **TT-108 E**

## Water temperature control unit

Direct cooled temperature control system



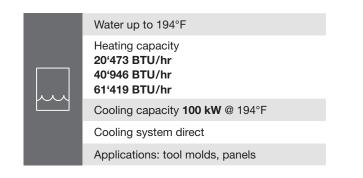

#### **Functions**

- Self optimizing temperature controller with temperature display 1/10°F – steps
- Display in °C to or °F and I/min or gal/min
- Digital flow display and monitoring
- Automatic temperature control
- Switchover for temperature control on the mould
- · Heating switchable in stages
- Pressure display
- Automatic or manual refill
- Automatic mould drainage
- Leak stopper device operation in pressure and vacuum mode possible

#### Construction


- Submersible sealless pump made from bronze
- · Powerful direct cooling
- Corrosion resistant device for a long service life
- All parts in contact with water are made of stainless steel or bronze
- Unit on castors

#### Safety features


- Level control for dry run protection
- Electronic temperature limitation and monitoring in the controller
- Mechanical safety thermostats
- · Visual and acoustic fault indications
- Integrated circuit breakers
- Main switch, transformer and motor protection switch



## **Cooling capacity**

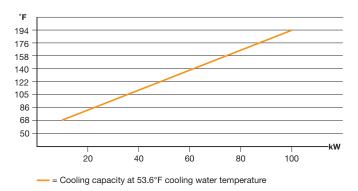

## **Pump capacity**

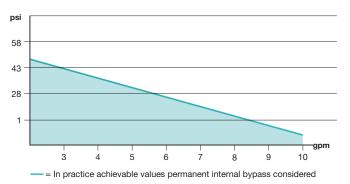

#### **Technical data**

Product attribute	Unit	TT-108 E			
Temperature range	°F	Up to 194°F with water			
Temperature control		Self optimizing, electronic microprocessor controller MP-888 with digital display of the set and actual value. Automatic temperature monitoring.			
Flow control		Electronically, with digital display and automatic control of the minimum flow.			
Heating capacity	BTU/hr	20'473 BTU/hr	40'946 BTU/hr	61'419 BTU/hr	
Switchable in stages		3/3	3/9	9/9	
Cooling capacity		Approx. 100 kW at 194°F see diagram			
Pump capacity					
Motor	HP	1 HP			
Pressure mode		Max. 58 psi / max. 16 gpm – see diagram			
Vacuum mode		Vacuum max. 23.17 inHg			
Filling amount		5.2 gallons			
Filling		Automatic			
Connections					
Medium		1/2" NPT female thread			
Cooling water					
Inlet		Water filter %" NPT female thread			
Outlet		1" NPT male thread			
Dimensions (L×W×H)	inch	28×12.8×30.9 inch, incl. castors			
Weight	lbs	Approx. 148 lbs empty			
Colour		Silvergrey RAL 7001			